

M100 NFPA



Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640

www.depurecousa.com
info@depurecousa.com

652
Compliant 

3,3 HP
POWER

3720 in²
FILTER

26 gal Bin
CAPACITY




3 POWERFUL BY-PASS MOTORS
120V
Max Airflow= 336 CFM
Max Depression= 98 inH2O




HEPA
Cartridge filter
(Optional)

4.400 in²



M CLASS
Antistatic
Star filter

3720 in²




**MANUAL SHAKER
CLEANING SYSTEM**

Smart handle for shaking
the filter aggressively to
release dust.




26 gal

**DETACHABLE BIN
WITH CASTERS**

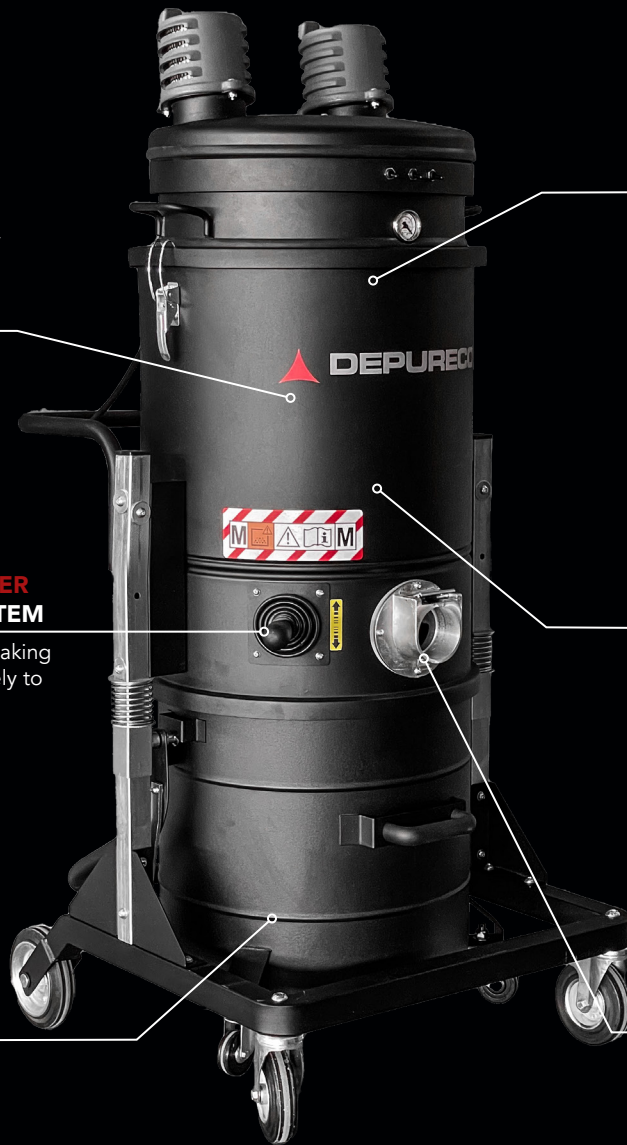

**INLET WITH
DEFLECTOR**



**WET & DRY FIXED BRUSH
FLOOR TOOL**



**TILTABLE KIT
FOR BIN DISCHARGE**



SPEC SHEET

	Units	M 100 NFPA
Motors Type		3 - By-Pass
Power	HP	3.3
Voltage Frequency	V/Hz	120/60
Maximum vacuum	inH2O	98
Maximum air flow	CFM	336
Inlet	Ø in	2.76
Noise level - (EN ISO 3744)	dB(A)	72
Bin capacity	gal	26
Dimensions	in	25.98 X 31.50
Height	in	59.65
Weight	lb	176
Primary filter		
Type		Star filter
Surface area Diameter (Class EN 60335-2-69)	in ² in	3.720
Media		M Class
Filter cleaning		Antistatic Polyester
		Manual Shaker
Optional Absolute filter		
Surface area	in ²	4.400
(Class - EN 1822)		H14
Media		Fiberglass

OPTIONAL FILTERS



PTFE
PTFE filter

OPTIONAL



AB
Accessory basket



TAN
Tangential inlet + cyclone



BX
AISI 304 stainless steel bin



GX
AISI 304 Bin and chamber



FLT
Floating device for liquids

ACCESSORIES



Iron reducer
Ø 2.75 / 2 in



Antistatic Kit
Ø 2 in



Antistatic Starter Kit
Ø 2 in